

REV.
A

FEDERAL SUPPLY CLASS
5935

RATIONALE

REVISED TO CORRECT REFERENCES AND CLARIFY QUALIFICATION AND QUALITY ASSURANCE REQUIREMENTS.

NOTICE

THE REQUIREMENTS FOR PROCURING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE LATEST ISSUE OF: SAE AS50151.

SAE AS25043

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.


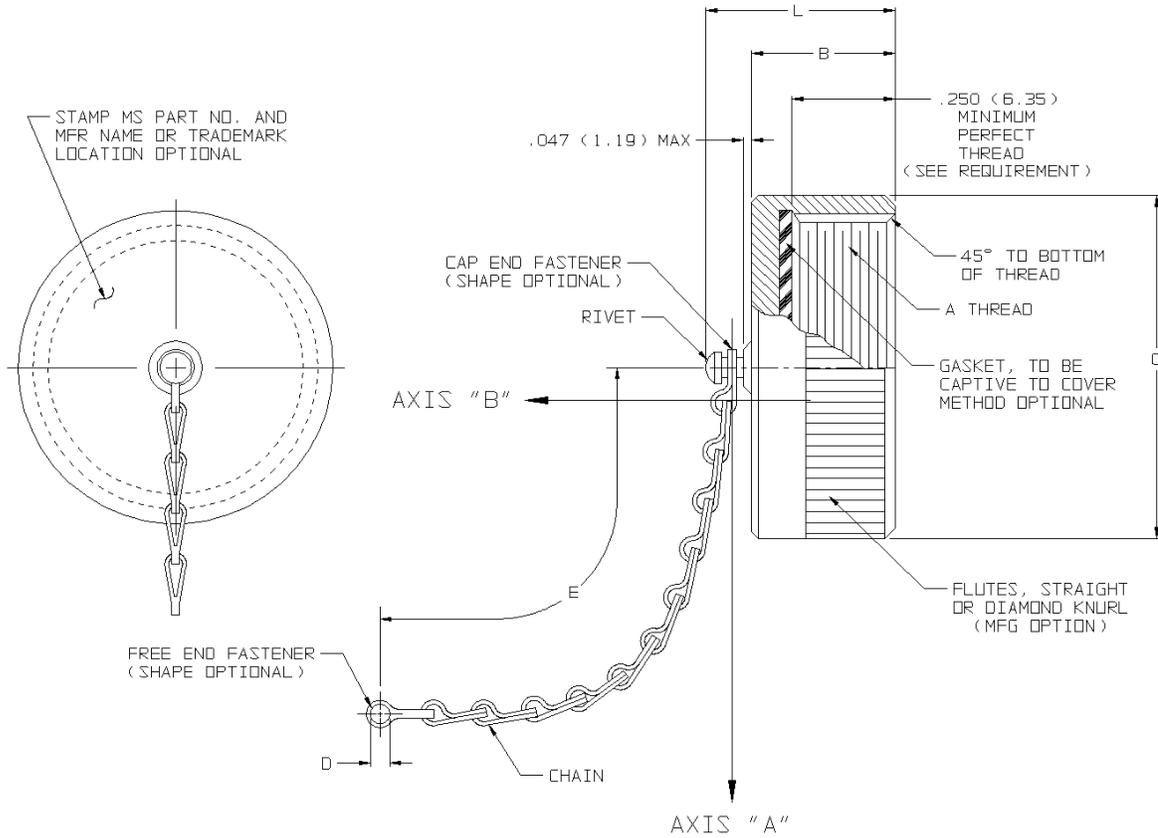


FIGURE 1 - COVER CONFIGURATION

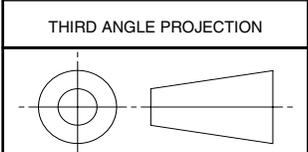

CUSTODIAN: SAE AE-8/AE-8C1

PROCUREMENT SPECIFICATION: AS50151

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

(R) COVER, ELECTRICAL AS50151 CONNECTOR, RECEPTACLE, AN TYPE

SAE AS25043
SHEET 1 OF 5

REV. A

Copyright 2008 SAE International
All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada) Tel: 724-776-4030 (outside USA)
Licensee=Naval Air Warfare/5954187003, User=Strizak, Michael
Not for Resale, 02/16/2010 07:09:35 MST ice@sae.org SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 2004-06 REVISED 2008-08

NOTES:

NOTICE

THIS DOCUMENT REFERENCES A PART WHICH CONTAINS CADMIUM AS A PLATING MATERIAL. CONSULT LOCAL OFFICIALS IF YOU HAVE QUESTIONS CONCERNING CADMIUM'S USE.

1. DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED. TOLERANCES ARE ±.016 (0.41) INCHES.
2. DIMENSIONS APPLY AFTER PLATING.
3. METRIC EQUIVALENTS SHOWN IN PARENTHESIS () ARE FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 1.000 INCH = 25.4 MM.

TABLE 1 - AS25043 DIMENSIONS (SEE FIGURE 1)

DASH NO. (-)	COUPLING SHELL SIZE (REF)	A THREAD (PER AS8879)	B MAX	C MAX DIA	D +.010 (0.27) -.005 (0.12) DIA	E ± 1 LINK	L MAX	SHELL SIZE RANGE (REF)
8	8S	.500-28 UNEF-2B	.469 (11.9)	.688 (17.5)	.140 (3.6)	4.000 (101.6)	.750 (19.1)	SMALL
10	10S, 10SL	.625-24 UNEF-2B		.813 (20.7)				
12	12S, 12SL	.750-20 UNEF-2B		1.000 (25.4)		4.500 (114.3)		
14	14S, 14SL	.875-20 UNEF-2B		1.125 (28.6)				
16	16, 16SL	1.000-20 UNEF-2B		1.188 (30.2)		5.000 (127.0)		
18	18	1.125-18 UNEF-2B		1.344 (34.1)				
20	20	1.250-18 UNEF-2B		1.469 (37.3)		5.500 (139.7)		
22	22	1.375-18 UNEF-2B		1.594 (40.5)				
24	24	1.500-18 UNEF-2B		1.719 (43.7)		.171 (4.3)		
28	28	1.750-18 UNS-2B		.531 (13.5)		1.969 (50.0)		
32	32	2.000-16 UN-2B	2.219 (56.4)					
36	36	2.250-16 UN-2B	2.469 (62.7)					
40	40	2.500-16 UN-2B	2.718 (69.0)					
44	44	2.750-16 UN-2B	2.969 (75.4)					
48	48	3.000-16 UN-2B	3.188 (81.0)					

REQUIREMENTS: THE PROTECTIVE COVERS SHALL MEET THE QUALIFICATION REQUIREMENTS AS STATED HEREIN (SEE APPLICATION NOTES).

1. DIMENSIONS AND CONFIGURATION: SEE FIGURE 1 AND TABLE 1. TO INSURE SEALABILITY, THE CONNECTOR MATING SURFACE OF THE GASKET MUST BE LOCATED SUCH THAT THE ".250 (6.35) MIN. PERFECT THREAD" (MPT) DEPTH IS GREATER THAN THIS SURFACE LOCATION OF THE GASKET WHEN REFERENCED FROM THE END OF THE COVER.
2. MARKING: MANUFACTURER SYMBOL SHALL BE IN ACCORDANCE WITH AIR1351.

 An SAE International Group	AEROSPACE STANDARD	SAE AS25043 SHEET 2 OF 5	REV. A
	(R) COVER, ELECTRICAL AS50151 CONNECTOR, RECEPTACLE, AN TYPE		

3. CONSTRUCTION: CAP END FASTENER SHALL ROTATE FREELY AFTER ASSEMBLED TO THE COVER.

4. MATERIAL:

COVER - ALUMINUM ALLOY PER ASTM B 211, B 221, B 26, B 26M, B 85, OR AMS-QQ-A-225/6, /7 OR /8

GASKET - SILICONE ELASTOMER DISK PER A-A-59588 (.050 / .070 (1.27 / 1.78) THICK)

CHAIN - STAINLESS STEEL SASH CHAIN PER RR-C-271, TYPE II, CLASS 3, GRADE B, PASSIVATED

CHAIN END FASTENERS - COMMERCIAL GRADE OF STAINLESS STEEL, PASSIVATED

5. FINISH A: AVAILABILITY (SEE TABLE 2)

TABLE 2 - FINISH

FINISH CODE	FINISH DESCRIPTION
D 1/	CADMIUM OLIVE DRAB OVER SUITABLE UNDERPLATE
DA	BLACK ANODIZE PER AMS-A-8625, TYPE II, CLASS 2

1/ NOT FOR MILITARY APPLICATIONS

6. AIR LEAKAGE: THE AIR LEAKAGE RATE SHALL BE NOT GREATER THAN ONE ATMOSPHERIC CUBIC INCH PER HOUR (4.5 × 10-3 CUBIC CENTIMETERS PER SECOND). COVER SHALL BE MATED TO A DUMMY RECEPTACLE FIXTURE WITH EXTERNAL TREADS. CHOICE OF FIXTURE FINISH IS OPTIONAL. THE SPECIFIED LEAKAGE RATE SHALL BE APPLIED THROUGH THE CENTER OF THE FIXTURE AND NOT THROUGH THE FLANGE AND MOUNTING SURFACE AREA. A MODIFIED AS31051 DUMMY RECEPTACLE MAY ALSO BE USED.

7. CHAIN TENSILE LOAD: THE PROTECTIVE COVER AND CHAIN ASSEMBLY SHALL WITHSTAND A DEAD WEIGHT TENSILE LOAD OF 25 POUNDS APPLIED TO AXIS A AND B FOR A PERIOD OF 5 MINUTES WHEN MOUNTED TO AN AS31051 DUMMY RECEPTACLE. THERE SHALL BE NO SEPARATION OF THE CHAIN ASSEMBLY FROM THE PROTECTIVE COVER OR DAMAGE TO THE CHAIN ASSEMBLY.

8. CORROSION (SALT SPRAY): COVERS SHALL MEET THE REQUIREMENT OF AIR4789.

9. QUALIFICATION: INITIAL QUALIFICATION SHALL BE PERFORMED SEQUENTIALLY IN ACCORDANCE WITH TABLE 3 ON TWO (2) SMALL, MEDIUM, AND LARGE SHELL SIZE SPECIMENS (SEE TABLE 1). TEST SPECIMENS SHALL CONSIST OF EACH FINISH FOR WHICH QUALIFICATION IS DESIRED (SEE TABLE 2).

a. QUALIFIED BY SIMILARITY WITHOUT TESTING SHALL BE COMPARED TO THE SPECIFICATION DIMENSIONS (CERTIFICATION OF COMPLIANT IS REQUIRED).

b. PERIODIC QUALIFICATION SHALL BE PERFORMED EVERY 36 MONTHS AFTER INITIAL QUALIFICATION UNLESS SUBMITTAL DATE IS ADJUSTED BY THE QUALIFYING ACTIVITY (SEE APPLICATION NOTE). CORROSION TEST REQUIRED FOR INITIAL QUALIFICATION AND EVERY OTHER RETENTION CYCLE THEREAFTER.

TABLE 3 - QUALIFICATION AND QUALITY ASSURANCE (QA) TESTS


QUALIFICATION TESTS	REQUIREMENT	TEST METHOD	QC TESTS
CONSTRUCTION	2 & 3	VISUAL EXAMINATION	REQUIRED
DIMENSIONS	FIGURE 1 & TABLE 1	MEASURE & RECORD	REQUIRED
MATERIALS	4	CERTIFICATION	
FINISH	5 & TABLE 2	CERTIFICATION	
AIR LEAKAGE	6	EIA 364-2	
CHAIN TENSILE STRENGTH	7	SEE REQUIREMENT	
CORROSION (FINISH CODE D)	8	EIA 364-26 TEST CONDITION D	
CORROSION (FINISH CODE DA)	8	EIA 364-26 TEST CONDITION B	

	AEROSPACE STANDARD	SAE AS25043 SHEET 3 OF 5	REV. A
	(R) COVER, ELECTRICAL AS50151 CONNECTOR, RECEPTACLE, AN TYPE		

10. QUALITY CONFORMANCE (QC) TESTS: SAMPLING SHALL BE 100%.

- a. INSPECTION LOT: AN INSPECTION LOT SHALL CONSIST OF ALL COVERS OF THE SAME TYPE PRODUCED UNDER ESSENTIALLY THE SAME CONDITIONS, AND OFFERED FOR INSPECTION AT ONE TIME.
- b. SAMPLING PLAN: STATISTICAL SAMPLING AND INSPECTION SHALL BE IN ACCORDANCE WITH ANSI/ASQC Z1.4 FOR GENERAL INSPECTION LEVEL II. THE ACCEPTABLE QUALITY LEVEL (AQL) SHALL BE 1.0 FOR MAJOR DEFECTS AND 4.0 FOR MINOR DEFECTS. MAJOR AND MINOR DEFECTS SHALL BE AS DEFINED IN MIL-STD-105/ANSI/ASQC 71.4.
- c. REJECTED LOTS: IF AN INSPECTION LOT IS REJECTED, THE CONTRACTOR MAY REWORK IT TO CORRECT THE DEFECTS, OR SCREEN OUT THE DEFECTIVE UNITS AND RESUBMIT FOR INSPECTION. RESUBMITTED LOTS SHALL BE INSPECTED IN ACCORDANCE WITH ANSI/ASQC Z1.4, TIGHTENED INSPECTION. SUCH LOTS SHALL BE SEPARATE FROM NEW LOTS AND SHALL BE CLEARLY IDENTIFIED AS INSPECTED LOTS. THE CONTRACTOR SHALL NOTIFY THE QUALIFYING ACTIVITY (SEE APPLICATION NOTE 3) IMMEDIATELY OF ANY QUALITY CONFORMANCE INSPECTION FAILURES WHICH RESULT IN A CHANGE IN CONTROL DRAWINGS OR PROCESS CONTROL INSPECTION POINTS. FAILURE TO NOTIFY THE QUALIFYING ACTIVITY MAY RESULT IN LOSS OF QUALIFICATION OF THAT PRODUCT.
- d. DISPOSITION OF SAMPLE UNITS: SAMPLE UNITS WHICH HAVE PASSED QUALITY CONFORMANCE INSPECTION MAY BE DELIVERED ON THE CONTRACT IF THE LOT IS ACCEPTED AND THE SAMPLE UNITS ARE STILL WITHIN SPECIFIED TOLERANCES.

11. PART NUMBER EXAMPLE (MS25043-12DA):

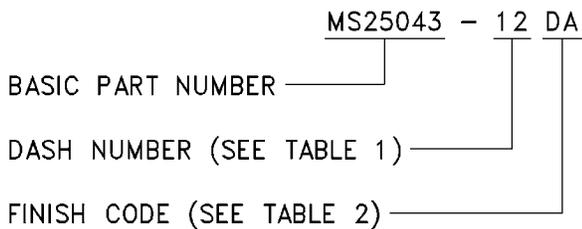

THE EQUIVALENT PROTECTIVE COVER SAE SPECIFICATION WHICH HAS SUPERSEDED THE MS25043 PART SPECIFICATION SHALL HAVE THE CORRESPONDING MS25043 PART NUMBER MARKED ON THE PART

12. SUPERSESSION PART NUMBERS: PART NUMBER SUPERSESSION FOR MILITARY APPLICATIONS (SEE TABLE 4).

TABLE 4 - PART NUMBER SUPERSESSION

MS25043 DASH NO. (-)	MS25043 SUPERSEDED DASH NO. (-)	
8DA	8C	8D
10DA	10C	10D
12DA	12C	12D
14DA	14C	14D
16DA	16C	16D
18DA	18C	18D
20DA	20C	20D
22DA 1/	22C	22D
24DA	24C	24D
28DA	28C	28D
32DA	32C	32D
36DA	36C	36D
40DA	40C	40D
44DA	44C	44D
48DA	48C	48D

1/ ALSO SUPERSEDES NAF-1307-3

 An SAE International Group	AEROSPACE STANDARD	SAE AS25043 SHEET 4 OF 5	REV. A
	(R) COVER, ELECTRICAL AS50151 CONNECTOR, RECEPTACLE, AN TYPE		

APPLICATIONS:

1. ANODIZED COVER (FINISH DA) SHALL BE MATED TO CONNECTOR FINISH CLASSES E, F, H, J, L, N, P, R, S AND W FOR MILITARY APPLICATIONS.
2. THE PROTECTIVE COVERS SHALL MEET THE QUALIFICATION REQUIREMENTS AS STATED HEREIN. QUALIFICATION IS REQUIRED FOR U.S. GOVERNMENT PROCUREMENT. THE QPL EVALUATING ACTIVITY, FOR U.S. DEPARTMENT OF DEFENSE PROCUREMENT PURPOSES, NAVAL AIR SYSTEMS COMMAND (CODE 4.4.5.3), 22229 ELMER ROAD BUILDING 2360, PATUXENT RIVER, MD 20670-1900. APPLICATIONS FOR QUALIFICATION TESTS SHALL BE MADE IN ACCORDANCE WITH PROVISIONS GOVERNING QUALIFICATION SD-6

SPECIFICATION NOTES:

1. A CHANGE BAR (I) LOCATED IN THE LEFT MARGIN IS FOR THE CONVENIENCE OF THE USER IN LOCATING AREAS WHERE TECHNICAL REVISIONS, NOT EDITORIAL CHANGES, HAVE BEEN MADE TO THE PREVIOUS ISSUE OF THIS DOCUMENT. AN (R) SYMBOL TO THE LEFT OF THE DOCUMENT TITLE INDICATES A COMPLETE REVISION OF THE DOCUMENT, INCLUDING TECHNICAL REVISIONS. CHANGE BARS AND (R) ARE NOT USED IN ORIGINAL PUBLICATIONS, NOR IN DOCUMENTS THAT CONTAIN EDITORIAL CHANGES ONLY.

 <i>An SAE International Group</i>	AEROSPACE STANDARD	SAE AS25043 SHEET 5 OF 5	REV. A
	(R) COVER, ELECTRICAL AS50151 CONNECTOR, RECEPTACLE, AN TYPE		